

# FLOWATCH® DESIGN

**SICCOM**

Complete kit, in-duct pump, for the condensate removal of air conditioners up to 10kW / 36 000BTU.


Ref: DE05LCF300



**PREMIUM**



Hose diameter  
Suction : 5/7 mm - supplied  
Discharge : 6/9 mm - not supplied

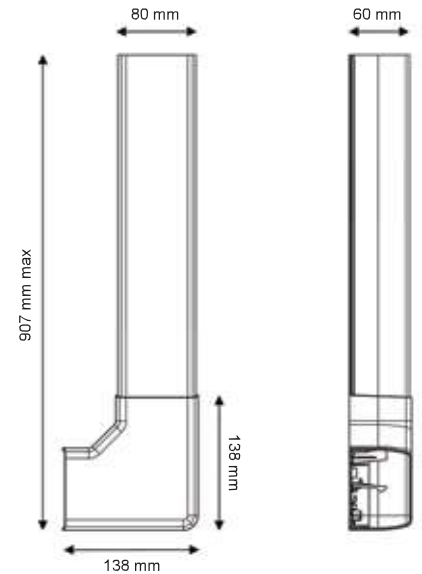


## SPECIFICATIONS

Flowrate max	15 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level	
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.6 m
Trunking dimensions	80 x 60 mm
Certifications	CE, EAC

\* The pump is able to run 100% of the time if necessary.

## FLOWRATE

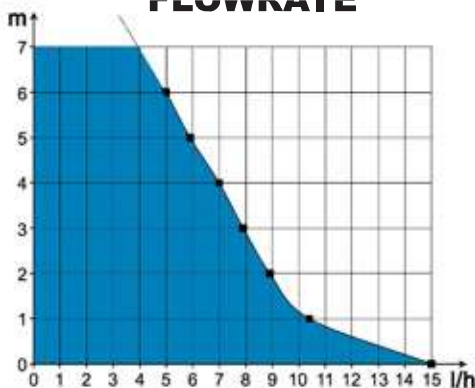

## Recommended accessory



### Connection extension kit

Allows the pump to be moved into a false ceiling, thus reducing the noise level.


Ref: GC1KCTC710

## BENEFITS



### mini FLOWATCH® 2 included

It assures a high reliability and an easy maintenance.



### Silent

Silent pump (20.2 dBA), suitable for an installation in any room.



### Stop Vibrations premounted

Eliminates vibrations transmitted to the discharge pipe, thus reducing the noise level of the system!



### Custom-made pump case

For easy installation, reduced noise level and perfect integration into the trunking.



### Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



### Pump relocation option

Thanks to the **Connection extension kit** (sold separately), the pump unit can be relocated to help reduce noise levels.

## CONTENTS



Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Stop Vibrations - Stop Siphoning - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Inlet tube - Suction tube 0.25m - Screws and rawlplugs